


Transport threaded rods M12 to be removed after installation

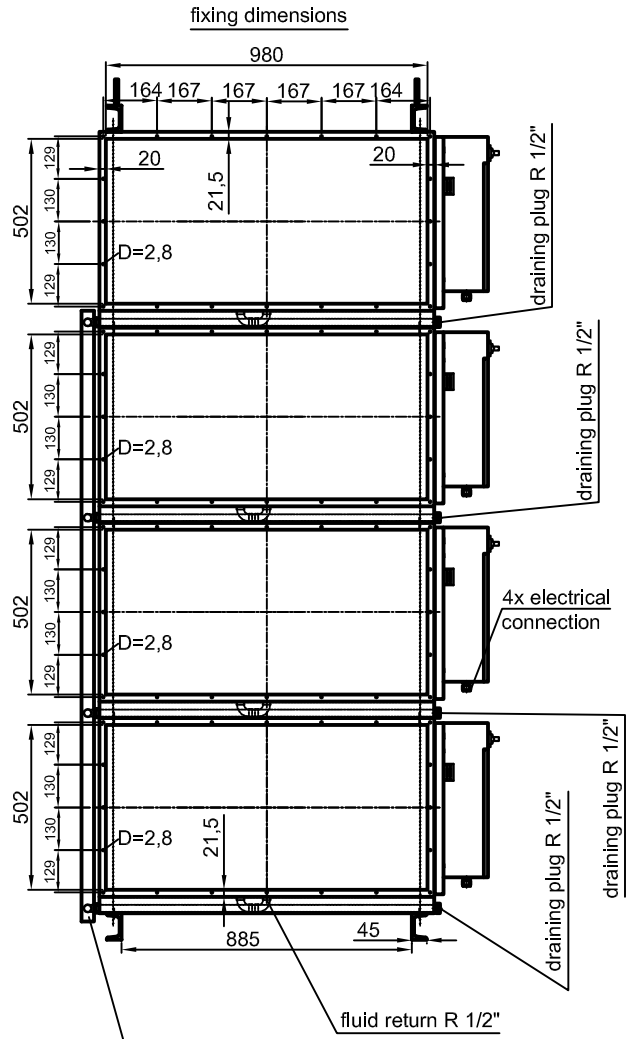

2x fluid return, downpipe R 1" ATTENTION!
For the 2 siphons to be connected by the customer, a clear height of 750mm is to be provided between device bottom edge and floor upper edge.

technical data (standard execution)

- * operating voltage: 230V, 50Hz, 1Ph+N+PE
- * total output: SH = 4x 0,2 kW / DH = 4x 0,4 kW
- * protection: IP 54
- * weight: max. 706 kg
- * colour: RAL 7035 grey
- * Other executions on request

Special executions and accessories can modify the technical data!

	ISI-Industrie-Produkte GmbH Industriepark Nord 16 53567 Buchholz / Mendt Tel. 02683/9794-0 Fax 7447		Oberfläche	Maßstab 1:1	Position - Menge -
			RON/AG106 RON/AG107	RON/AG108 -	
			Datum 26.11.12	Name AB	
			Bearb. Gepr. Norm	RON/A20000 DH oG RON/A20000 DH retrofittable oG	
					Blatt - BI
Zust. Änderungen	Datum	Name	Dateiname	<small>(Name und Datum des Zeichnenden)</small>	