


Transport threaded rods M12
to be removed after installation

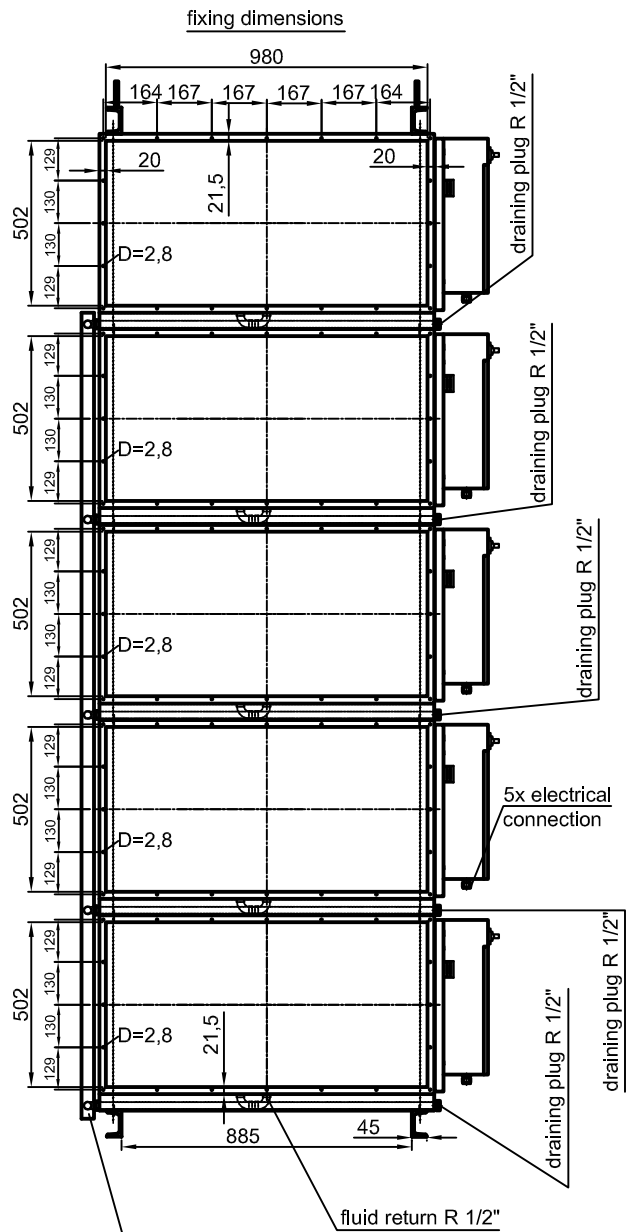


2x fluid return, downpipe R 1"
ATTENTION!
For the 2 siphons to be connected by the customer,
a clear height of 750mm is to be provided between
device bottom edge and floor upper edge.

technical data (standard execution)

- * operating voltage: 230V, 50Hz, 1Ph+N+PE
- * total output: SH = 5x 0,2 kW / DH = 5x 0,4 kW
- * protection: IP 54
- * weight: max. 869 kg
- * colour: RAL 7035 grey
- * Other executions on request

Special executions and accessories can modify the technical data!

| | | | |
|---|-----------------|------------------------|--------------------|
|  ISI-Industrie-Produkte GmbH Industriepark Nord 16 53567 Buchholz / Mendt Tel. 02683/9794-0 Fax 7447 | Oberfläche | Maßstab 1:1 | Position - Menge - |
| | | RON/AG109 RON/AG110 | RON/AG111 - |
| | Datum | Name | |
| | Bearb. 26.11.12 | AB | |
| | Gepr. | | |
| | Norm | | |
| Zust. Änderungen | | Datum | Name |
| Dateiname | | (Musterzeichnung) | |
| RON/A25000 DH oG RON/A25000 DH retrofitable oG | | | Blatt - BI |