
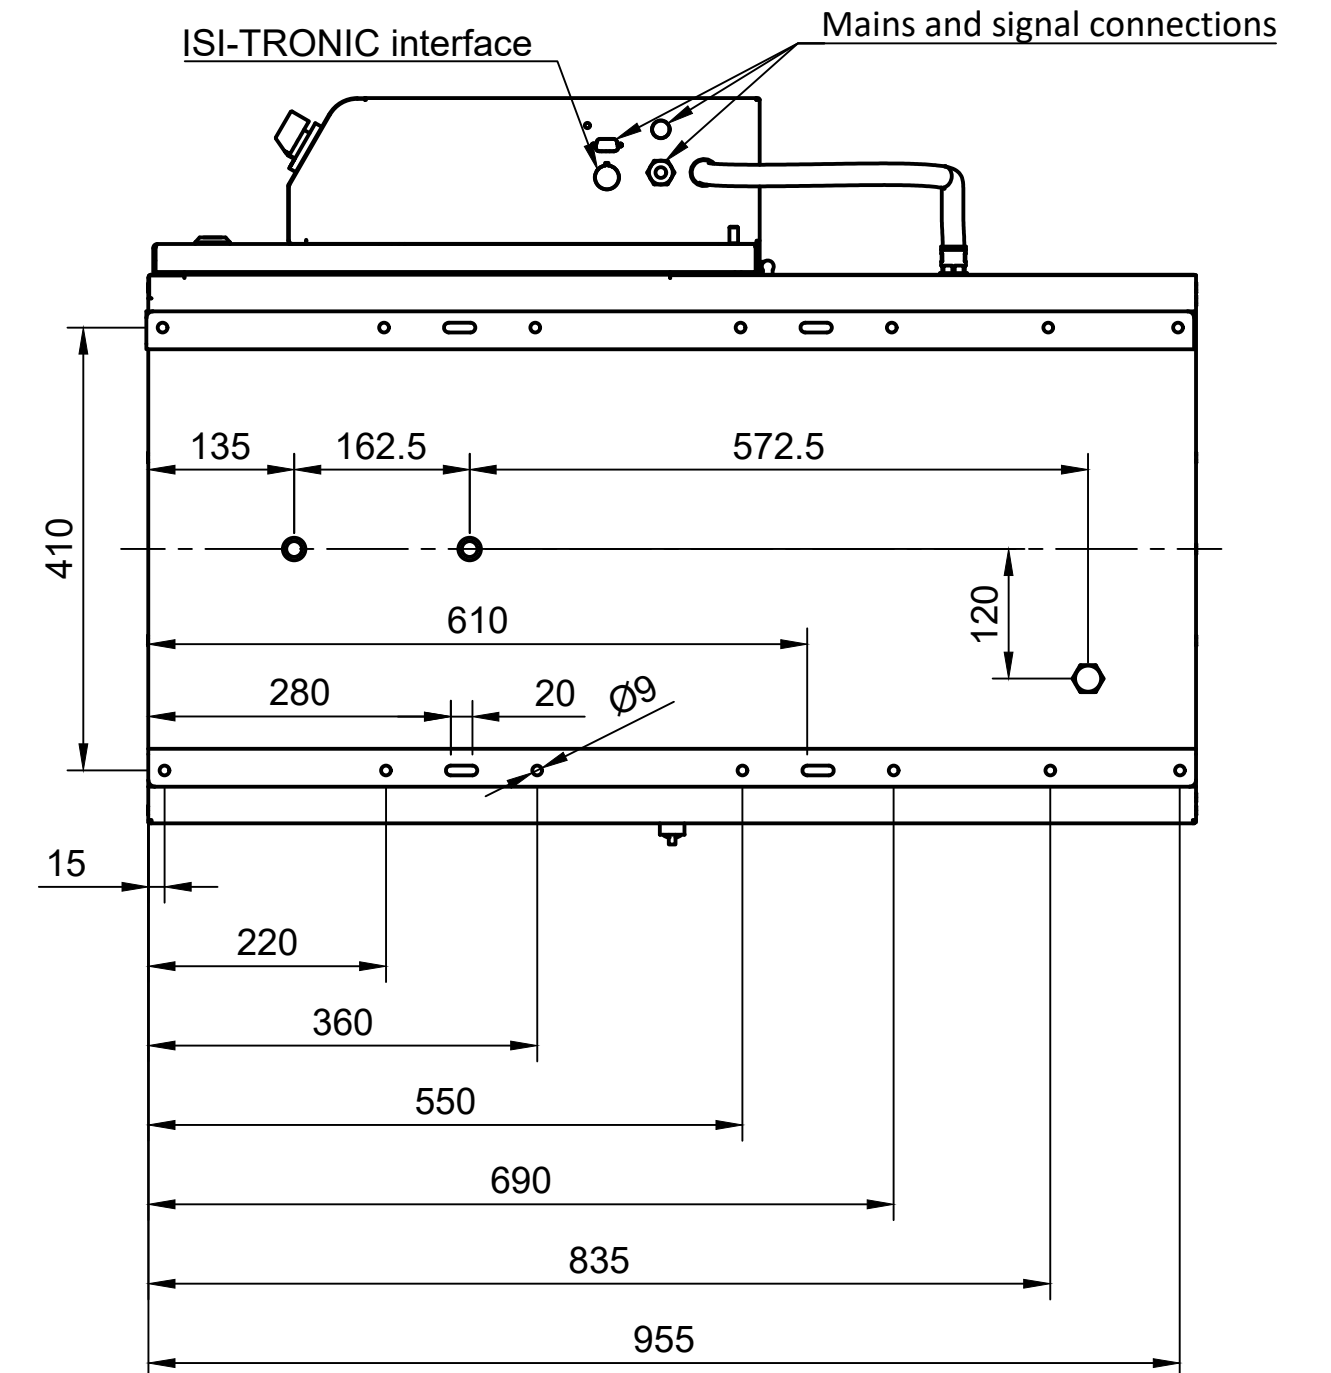


View A

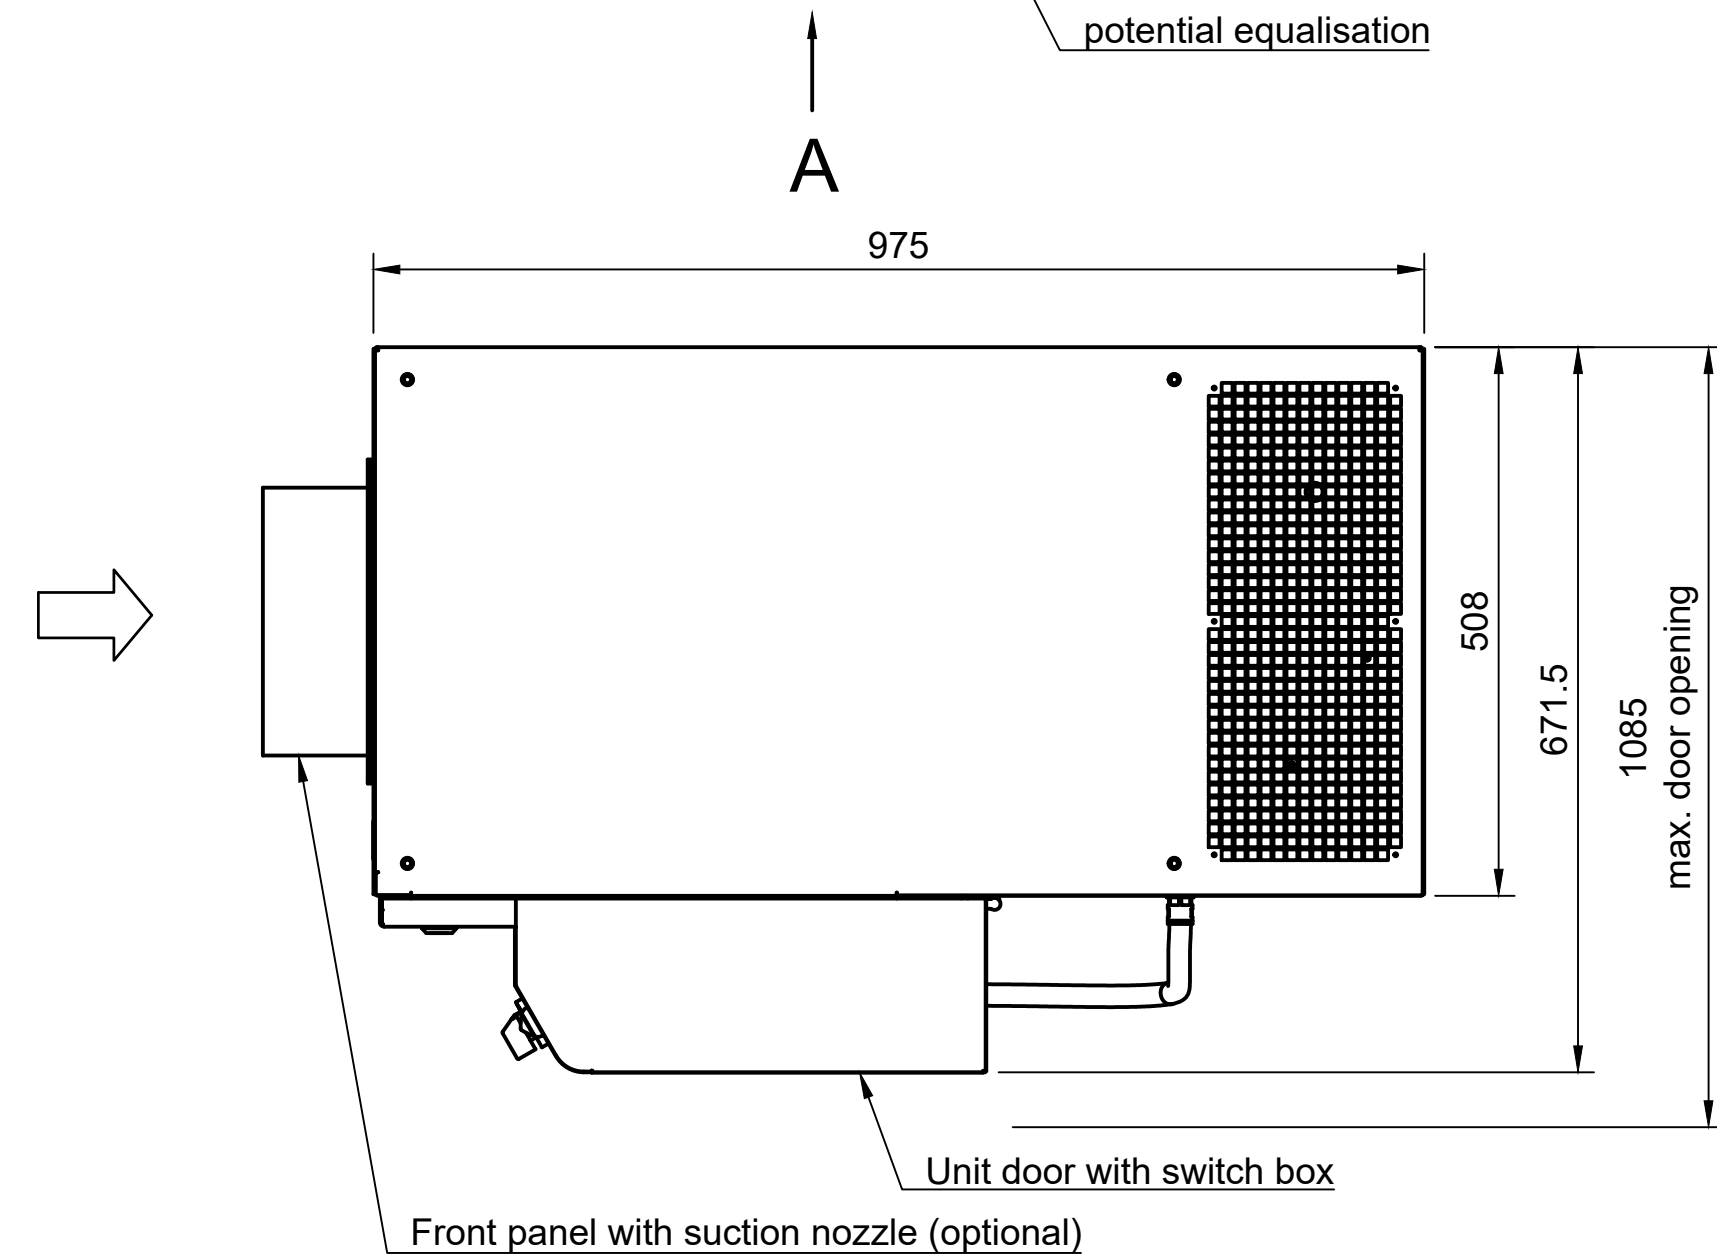


Front panel with suction nozzle (optional)

* Operating voltage:	400V, 50/60Hz, 3Ph+PE
Power consumption:	max. 0,62 kW
Protection class:	IP54
Noise level:	65dB (A)
Weight:	ca. 90kg
* Colour:	RAL 7035 Light grey

Extraction air volume V:

V max. Fan capacity:	2600m³/h
V free blowing without front plate:	2220m³/h
V with front plate and spigot:	Ø150 1300m³/h
	Ø200 1740m³/h
	Ø250 1960m³/h
	Ø300 2080m³/h

optional versions and attached accessories may lead to differences

Allgemeintoleranzen		Material	
Abteilung Technik	Maßstab 1:7	Erstellt von Steffen Hiltmann	Genehmigt von
 ISI-Industrieprodukte GmbH Industriepark Nord 16 53567 Buchholz / Mendt Tel.: +49 2683 9794-0 www.isi-luftfilter.de		Dokumentenart Unit drawing	Art.-Nr.
		Typ E-RON4STR E-RON4SEC	
Rev. 1	Ausgabedatum 13.09.2023	Blatt 1/1	